



HOT WATER HEAT PUMPS

Innovative, Energy Efficient Water Heating Technology



The Quantum story is based on innovation and the quest to harness renewable energy to produce sustainable hot water.

The origins of the company go back to the mid 1970's when extensive research work was undertaken by the University of Melbourne in the development of heat pump technology for the production of hot water. Today this patented technology is used in thousands of Australian homes as well as commercially in Australia, New Zealand, Asia and Europe.

With over 30 years of on-going product development, Quantum are the experts in Heat Pump water heating. Our products have been tried and tested to perform reliably and efficiently throughout Australia, in even the harshest water and weather conditions.



Hot water heating accounts for about **23% of your homes' total energy usage**, and is the second highest contributor to your annual electricity bills, using more energy than almost all of your other domestic appliances combined.¹

The largest range of Heat Pumps in Australia.

With the largest range of compact heat pumps available in Australia, Quantum has a solution for your home or commercial project.

Our extensive range of products can service single bedroom/bathroom residences, right through to multi-level offices, hotels, motels, resorts, recreational facilities, retail outlets; and everything in between. We can also tailor a solution for your specific commercial applications. Water heating is the largest source of greenhouse gas emissions from an average Australian home and the second largest segment of household energy use in Australia, after space heating and cooling.¹

By installing the most appropriate and efficient water heater for your household size, water use patterns and climate you can save money and reduce greenhouse gas emissions without compromising your lifestyle.²

Most people are aware of three ways to generate hot water in their home or business – electric, gas or conventional solar (with roof panels and a booster element); but there is a fourth, and it's one of the most efficient hot water systems available – the Quantum Heat Pump.

Installing a Quantum heat pump system is almost identical to installing a regular electric hot water system. There are no roof panels or additional components, meaning an easy, trouble-free conversion from electric hot water to sustainable and reliable solar hot water for your home.

Our commitment to on-going product development and customer service ensures that Quantum remains the number one choice when it comes to Heat Pump hot water.

¹ Australian Government, **Your Home - Australia's guide to environmentally sustainable homes** (2013) ² DCCEF 2012

FEATURES

Quantum Domestic and Commercial Heat Pumps



Suitable for use in harsh water quality conditions

The water does not make contact with any operational components, only the inner lining of the tank.



Low noise rating

Ultra quiet operation as low as 48dB – less than an average split system air conditioner.



Solar without the panels

Hot water from solar energy, without the need for direct sunlight or roof panels. Heat pumps generate hot water day and night.



Easy installation

A compact design resulting in reduced labour and installation costs.



No booster element

Quantum heat pumps operate in ambient temperatures as low as -10°C. No booster element, means less energy consumption.



Government rebates

Eligible installations attract a substantial energy efficiency cash rebate.



Patented Tank Wrap™ design

Quantum's patented wrap design offers one of the fastest hot water recovery rates in the heat pump market.



Save on power bills

Can cut up to 70% of running costs compared to some electric storage units.

What Rebates are Available?

There are a number of government initiatives designed to encourage the use of energy efficient products including the use of Quantum Heat Pump hot water services.

Federal Small Scale Technology Certificates

Quantum heat pumps systems are eligible for grants through the Federal Governments Small-scale Renewable Energy Scheme. These grants are called Small-scale Technology Certificates (STCs) and are offered based on how sustainable a hot water system is. Your STC rebate value will depend on your installation location and size of system selected.

Please visit

www.rec-registry.gov.au/rec-registry/app/calculators

NSW State Government Rebates

New South Wales customers there are additional rebates for replacing inefficient hot water systems with Quantum Heat Pumps. Energy Savings Certificates (ESCs) are offered for eligible installations on top of the Federal STC grants. There are several activities which create ESC's as follows:

(subject to ACP Terms and Conditions)


- IHEAB Replacing an existing commercial gas or electric hot water system with Quantum Heat Pumps. Only applies to commercial buildings.
- PDRS (Peak Demand Reduction Scheme) Replacing an existing electric hot water system with a Quantum Heat Pump.
- HEER Replacing an existing electric or gas storage hot water system with a Quantum Heat Pump at a residential property.

For more information please visit: www.energysustainabilityschemes.nsw.gov.au/ESS

Victorian State Government Rebates

For Victorian customers there are additional rebates for replacing inefficient hot water systems with Quantum Heat Pumps. Victorian Energy Efficiency Certificates (VEECs) are ofered for eligible installations on top of the Federal STC grants (except under Activity 44). There are several activities which create VEECs as follows: (subject to ACP Terms and Conditions)

- Activity 1D Replacing an electric resistance hot water system with a Quantum Heat Pump in a residential setting.
- Activity 3C Replacing a gas hot water system with a Quantum Heat Pump in a residential setting.
- Activity 44A Replacing a gas hot water system with a Heat Pump in a business or commercial setting.
- Activity 44B Replacing an electric hot water system with a Quantum Heat Pump in a business or commercial setting.
- Activity 44C Installing a new Quantum Heat Pump in a business or commercial setting.
 For more information please visit: www.veu-registry.vic.gov.au/Public/Public.aspx

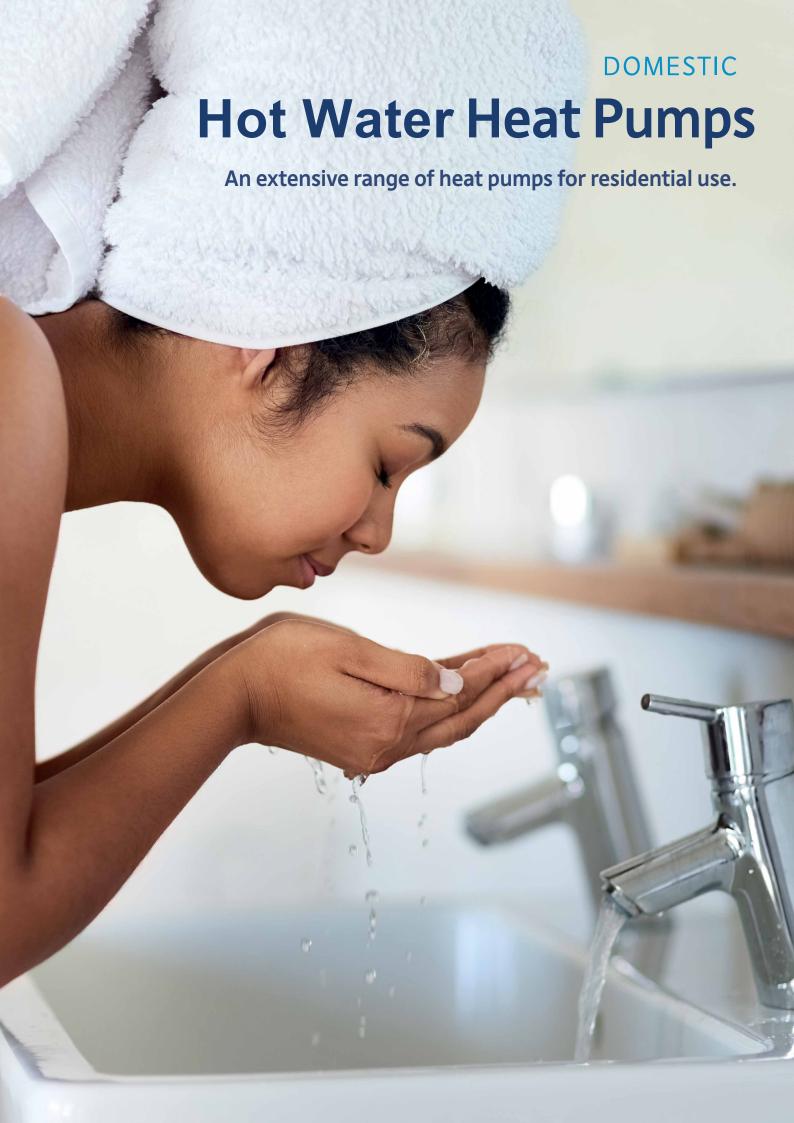

DOMESTIC

Features

- Compact design with integrated refrigeration unit
- Energy efficient hot water production that reduces energy use and greenhouse gas emissions†
- Easy installation
- Rebates available
- Designed and manufactured to Australian Standards
- ✓ Warranty 5 years tank, 2 years electric and refrigeration inclusive of parts and labour

Rated Delivery Heating Output Power Input COP of Heating* Compressor Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature Water Temperature Setting
Heating Output Power Input COP of Heating* Compressor Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Power Input COP of Heating* Compressor Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
COP of Heating* Compressor Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Compressor Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Refrigerant Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Electrical Supply Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Circuit Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Water Connections PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
PTR Valve Setting ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
ECV Setting PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
PLV Without ECV Fitted PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
PLV With ECV Fitted Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Operating Sound Level** Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Dimensions (Height x Diameter) Nett (Empty) Weight Ambient Operating Temperature
Nett (Empty) Weight Ambient Operating Temperature
Ambient Operating Temperature
Water Temperature Setting
Hot Water Production Rate*


150L Heat Pump Model: 150-08AC6-290











150 L 130 L 3.61 kW 0.84 kW 4.3 Rotary R290 220-240V/50Hz/1Ph

10 Amps 3/4" BSP 850 kPa

700 kPa

500 kPa 300-500 kPa

50 dBA

1620 mm x 540 mm

100 kg

-10 °C to +35 °C

60 °C

72 L/hr


200L Heat Pump Model: 200-08AC6-290











200 L

175 L 3.61 kW

0.84 kW

4.3

Rotary

R290

220-240V/50Hz/1Ph

10 Amps

3/4" BSP

850 kPa

700 kPa

500 kPa

300-500 kPa

50 dBA

1950 mm x 540 mm

115 kg

-10 °C to +35 °C


60 °C

72 L/hr

270L Heat Pump Model: **270-08AC6-290**

REGULAR





270 L 250 L 3.81 kW 0.84 kW 4.53

Rotary R290

220-240V/50Hz/1Ph

10 Amps

3/4" BSP

850 kPa

700 kPa

500 kPa

300-500 kPa

48 dBA

1900 mm x 650 mm

135 kg

-10 °C to +35 °C

60 °C

75 L/hr

340L Heat Pump Model: **340-08AC6-290**









LARGE

340 L

315 L

3.81 kW

0.84 kW

4.53

Rotary

R290

220-240V/50Hz/1Ph

10 Amps

3/4" BSP

850 kPa

700 kPa

500 kPa

300-500 kPa

48 dBA

2200 mm x 650 mm

170 kg

-10 °C to +35 °C


60 °C

75 L/hr







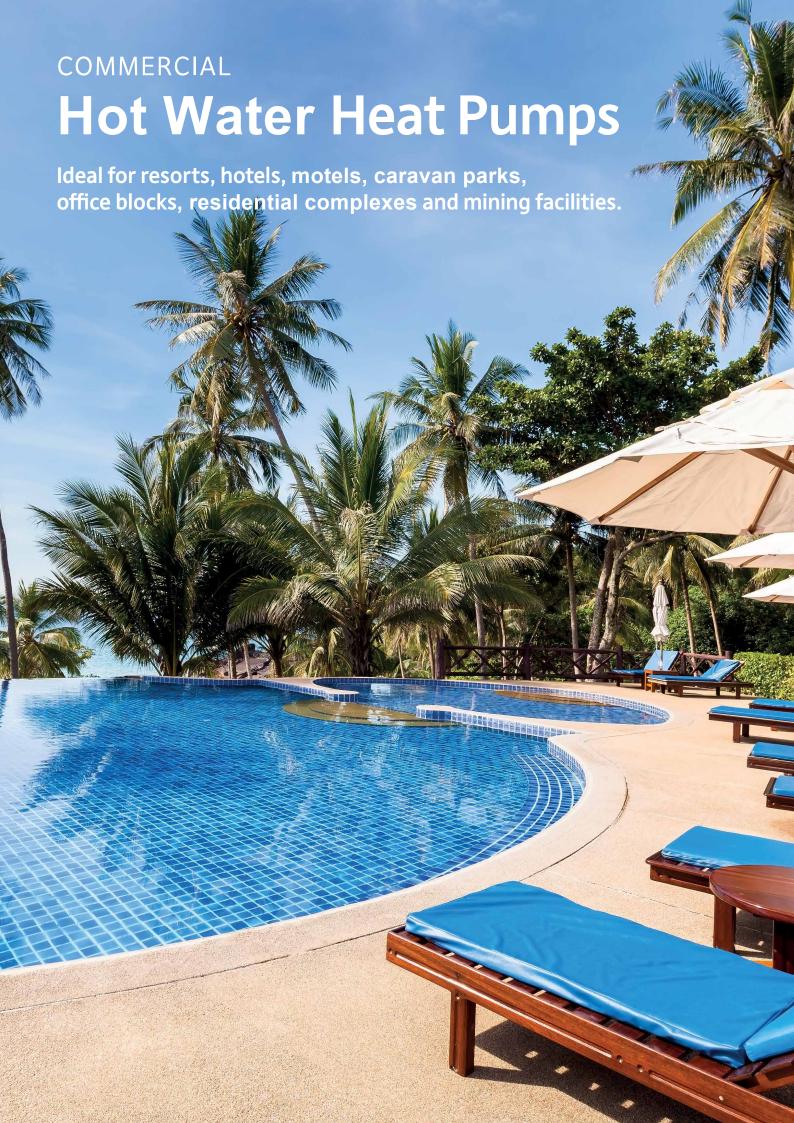

COMMERCIAL

Features


- Compact design with integrated refrigeration unit or split system option
- Energy efficient hot water production that reduces energy use and greenhouse gas emissions[†]
- Easy installation
- Rebates available
- Designed and manufactured to Australian Standards
- Warranty
 5 years tank, 2 years electric and refrigeration inclusive of parts and labour

Storage Size
Rated Delivery
Heating Output
Power Input
COP of Heating*
Compressor
Refrigerant
Electrical Supply
Circuit
Water Connections
PTR Valve Setting
ECV Setting
PLV Without ECV Fitted
PLV With ECV Fitted
Operating Sound Level**
Dimensions (Height x Diameter)
Nett (Empty) Weight
Ambient Operating Temperature
Water Temperature Setting
Hot Water Production Rate*

Titan 340L Heat Pump Model: **340-17ACW-134**







340 L
315 L
6.22 kW
1.66 kW
3.57
39cc Rotary
R134a
220-240V/50Hz/1Ph
15 Amps
3/4" BSP
850 kPa
700 kPa
500 kPa
300-500 kPa
58 dBA
2300 mm x 650 mm
180 kg

-10 °C to +35 °C

60°C

134 L/hr

Titan 340L Split System Model: 340-17ASW-134



Evaporator may be remotely installed up to 8m from the tank.
340 L
315 L
6.22 kW
1.66 kW
3.74
39cc Rotary
R134a
220-240V/50Hz/1Ph
15 Amps
3/4" BSP
850 kPa
700 kPa
500 kPa
300-500 kPa
58 dBA
2110 mm x 650 mm
165 kg + 15 kg

-10 °C to +35 °C

60 °C


134 L/hr

How Does it Work?

A simple concept, brilliantly executed. The Quantum Heat Pump works on a patented refrigeration principle similar to that found in an air conditioner, or refrigerator – but in reverse.

A traditional solar hot water service typically consists of collector panels or tubes fitted to your roof which water flows through and then into a storage tank. This service relies on the sun and in Australia can provide between 50-90% of hot water for your home³, an electric 'booster element' kicking in to cover any shortfall.


A Quantum Heat Pump however makes use of the heat in the ambient air around the system, and a reverse refrigeration process to heat the water. This means the sun doesn't need to be shining, and what's more, it's so efficient that it can provide reliable hot water 24 hours a day, even in temperatures as low as -10°C with no booster element.



A Quantum heat pump will cost just a fraction to run when compared to other traditional forms of water heating – representing a **significant financial benefit** as well as reducing greenhouse gas emissions and the environmental footprint of your home.

HOW IT WORKS

Solar Energy From the Air

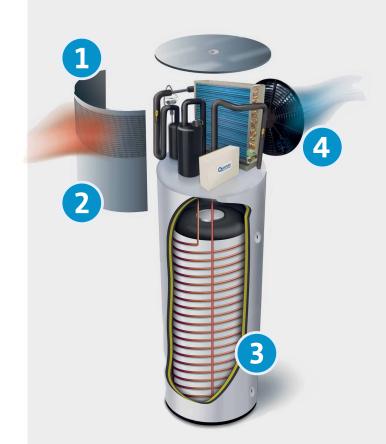

1 Sun heats the air

Heat pumps rely on ambient air temperature rather than incidental sunshine. Utilising refrigeration principles, Quantum Heat Pumps can extract heat from the air without the need for direct sunlight, and can produce hot water in rain, hail or shine – without the need for a booster element.

2 Energised air inducted into heat pump

Once the air is drawn into the heat pump, it passes over an evaporator containing a refrigerant which boils at a very low temperature. The boiling refrigerant is then compressed causing its' temperature to be raised even further – transforming it into a super-heated vapour.

3 Energy transferred to heat cold water

Using Quantum's patented Tank Wrap™ technology, this super-heated vapour is fed through copper coils (condenser) wrapped around the outside of the water tank, heating the water evenly and efficiently from the outside in.

4 Cold air expelled

Once the heat has been extracted from the air and transferred to the water, the remaining cold air is discharged from the heat pump by fan. Once the desired water temperature is reached, the system will go into energy-saving standby mode until it is required to commence heating again.



Hot Water Production Rate (COP)

	Hot Water Production Rate, Litres per Hour (COP)							
Ambient Air Temperature	150L 150-08AC6-290	200L 200-08AC6-290	270L 270-08AC6-290	340L 340-08AC6-290	Platinum 270L 270-08AS6-290	340L 340-17ACW-134	340L Split 340-17ASW-134	
35 °C	110 L/hr (5.55)	110 L/hr (5.55)	113 L/hr (5.75)	113 L/hr (5.75)	113 L/hr (5.75)	199 L/hr (5.30)	199 L/hr (5.30)	
30 °C	98 L/hr (5.12)	98 L/hr (5.12)	102 L/hr (5.42)	102 L/hr (5.42)	102 L/hr (5.42)	177 L/hr (4.69)	177 L/hr (4.69)	
25 °C	85 L/hr (4.73)	85 L/hr (4.73)	89 L/hr (4.98)	89 L/hr (4.98)	89 L/hr (4.98)	154 L/hr (4.09)	154 L/hr (4.09)	
20 °C	72 L/hr (4.30)	72 L/hr (4.30)	75 L/hr (4.53)	75 L/hr (4.53)	75 L/hr (4.53)	131 L/hr (3.57)	131 L/hr (3.57)	
15 °C	58 L/hr (3.88)	58 L/hr (3.88)	61 L/hr (4.08)	61 L/hr (4.08)	61 L/hr (4.08)	109 L/hr (3.03)	109 L/hr (3.03)	
10 °C	48 L/hr (3.45)	48 L/hr (3.45)	51 L/hr (3.64)	51 L/hr (3.64)	51 L/hr (3.64)	90 L/hr (2.53)	90 L/hr (2.53)	
5 °C	38 L/hr (3.03)	38 L/hr (3.03)	42 L/hr (3.19)	42 L/hr (3.19)	42 L/hr (3.19)	73 L/hr (2.09)	73 L/hr (2.09)	
0 °C	31 L/hr (2.60)	31 L/hr (2.60)	33 L/hr (2.75)	33 L/hr (2.75)	33 L/hr (2.75)	59 L/hr (1.71)	59 L/hr (1.71)	
-5 °C	26 L/hr (2.18)	26 L/hr (2.18)	29 L/hr (2.30)	29 L/hr (2.30)	29 L/hr (2.30)	51 L/hr (1.50)	51 L/hr (1.50)	
-10 °C	24 L/hr (1.75)	24 L/hr (1.75)	26 L/hr (1.86)	26 L/hr (1.86)	26 L/hr (1.86)	45 L/hr (1.34)	45 L/hr (1.34)	





Make your next water heater a Quantum heat pump.

quantumenergy.com.au





Sales Enquiries ©1800 644 705

Email: sales@quantumenergy.com.au

Warranty & Service \(\bar{\cappa} \) 1800 644 705

Email: service@quantumenergy.com.au

Quantum Energy Technologies Pty Ltd 22 Rosebery Avenue Rosebery NSW 2018

Warranty

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Refer to quantumenergy.com.au for warranty details.

WARNING: Products in this brochure and all literature pertaining to, are subject to Intellectual Property Protection. All dimensions given are approximate and should be checked prior to installation.